
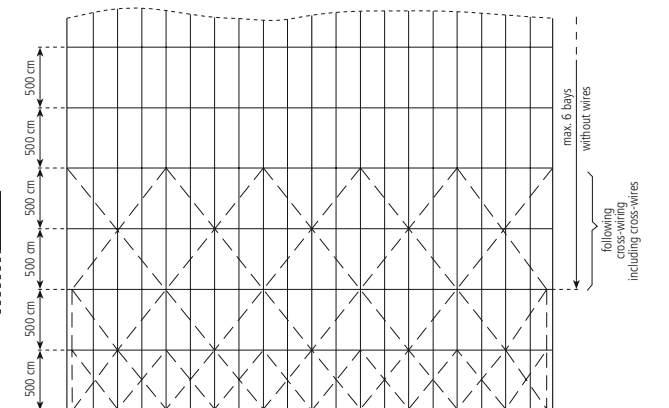
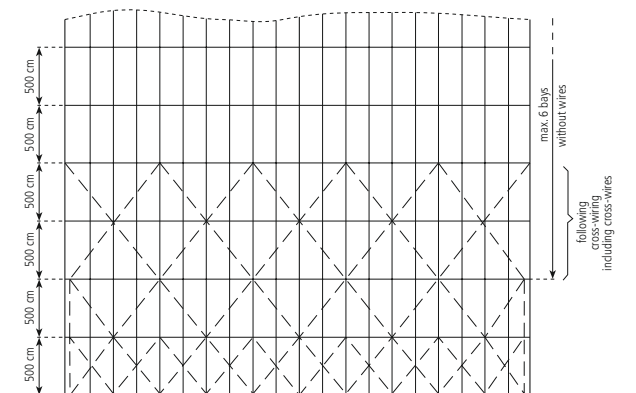


STANDARD VERSION

Span	4.000 cm	5.000 cm	6.000 cm
Side height	385 cm	385 cm	385 cm
Ridge height	1.035 cm	1.200 cm	1.360 cm
Roof pitch	18°	18°	18°
Bay distance / grid	500 cm	500 cm	500 cm
Main profile	285 x 124 x 7,5/5,2 mm	350 x 124 x 10/6 mm	355 x 124 x 12/5 mm
Gable uprights	7	9	11
Max. wind speed according to EN	130 km/h		
Flooring	· Wood floor with timber or steel-aluminum substructure · Cassette flooring · Heavy duty floor		
Tarpaulin	RÖDER No. 1, PVDF-coated tarpaulin, according to DIN 18204		

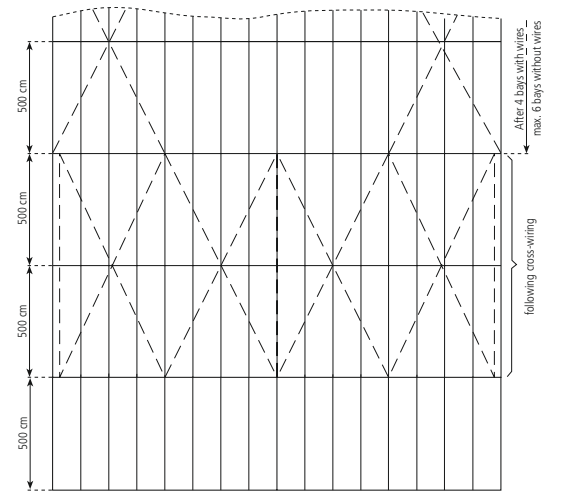

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Röder team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.